

Keeps Basements Dry.

DELTA®-MS

The high performance air-gap membrane that keeps basements dry and mold-free.

- Reliably bridges foundation cracks, unlike asphaltic sprays.
- Foundation protection system.
- Provides capillary break.
- Typical foundation completed in 1 to 2 hours.
- Air-gap Technology allows incidental water to drain down freely.
- Eliminates interior dampness and musty odors.
- Keeps wet soil away from foundation.
- Installs quickly and easily in all types of weather, even freezing temperatures.
- May be installed on wet or damp concrete or during cold weather.
- No delay in backfilling.
- Resists damage in backfilling, like rocks and debris.
- No specialized safety equipment.
- No specialized installation equipment; eliminates mechanical spray delays.
- Virtually eliminates call backs.
- Meets with IRC and IBC (ICC-ESR-2303) and CCMC (12788-R Drainage and 12658-R Dampproofing).

Compressive Strength:


approx. 5,200 psf (250 kN/m²)

Roll length:

65' 7" (20 m)

Roll width:

3' 6" (1.07 m)	7' (2.13 m)
5' (1.52 m)	8' (2.45 m)
6' (1.83 m)	9' 10" (3.00 m)
6' 7" (2.00 m)	

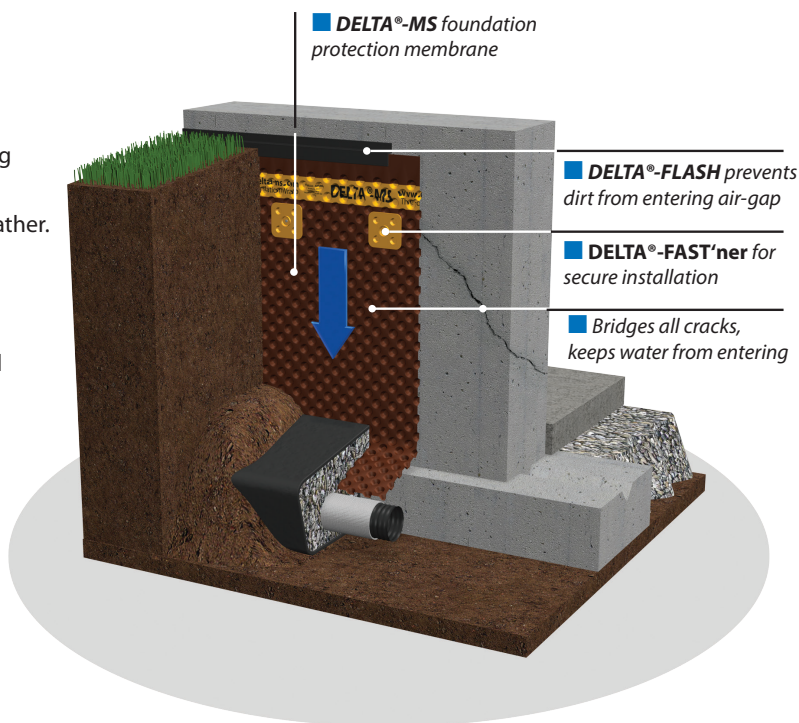

Available at:

DELTA® is a registered trademark of Ewald Dörken AG, Herdecke, Germany. 06/30/21v2