

Self Adhered, Lightweight & Tear-resistant.

DELTA®-VENT SA

Vapor permeable, fully adhered water-resistive barrier and air barrier.

- Aggressively self-adhesive.
- An air- and water-tight adhesive edge.
- Very efficient drainage plane.
- Highly vapor permeable (50 perms).
- Lightweight and tear-resistant.
- Improves performance of building enclosure.
- Helps to ensure a healthy and comfortable interior climate.
- Split release liner aids installation.
- Matte gray color reduces irritating glare during installation.
- Complete system with full line of DELTA®-Accessories.
- Compatible with common compatible substrates.
- Primerless application.
- Interfaces easily with other products.
- Full installation training available.
- Complete specification support.
- NFPA 285 compliant assemblies.
- Air Barrier Association of America (abaa) evaluated.
- Passes ASTM D1970 Nail Sealability.
- Meets the requirements of NBC, IBC & IRC.
- ICC ESR-2932

Vapor permeance:


50 perms (Method B [grains/h/ft²/in Hg] ASTM E96-05)

Roll length:

115' (35 m)

Roll width:

4.92' (1.5 m) 9.75" (25 cm) 19.5" (50 cm)

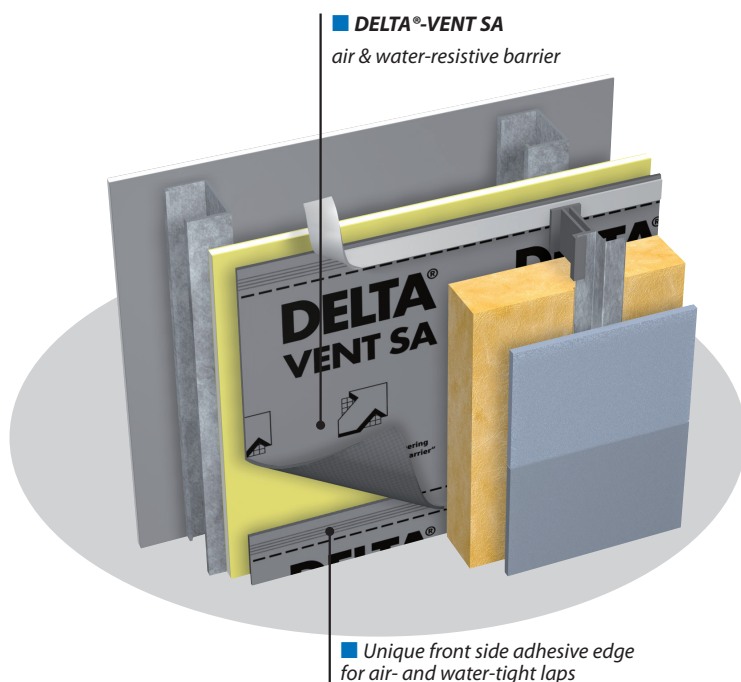

Available at:

DELTA® is a registered trademark of Ewald Dörken AG, Herdecke, Germany. 06/30/21v1